(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 11 November 2004 (11.11.2004)

PCT

(10) International Publication Number WO 2004/097860 A1

(51) International Patent Classification7:

H01C 17/26

(21) International Application Number:

PCT/CA2004/000397

(22) International Filing Date: 19 March 2004 (19.03.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/455,855


20 March 2003 (20.03.2003)

- (71) Applicant (for all designated States except US): MICRO-BRIDGE TECHNOLOGIES INC. [CA/CA]; Suite 505, 1980 Sjerbrooke Street West, Montréal, Québec H3H 1E8 (CA).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GRUDIN, Oleg [CA/CA]; Apt. 2404, 1411 du Fort Street, Montréal, Québec H3H 2N7 (CA). LANDSBERGER, Leslie, M. [CA/CA]; 310 Elm Avenue, Westmount, Québec H3Z 1Z5 (CA). FROLOV, Gennadiy [UA/CA]; 2250 Guy Street, Montréal, Québec H3Z 2M3 (CA). GRUDINA, Lyudmila

- [CA/CA]; Apt. 2404, 1411 du Fort Street, Montréal, Québec H3H 2N7 (CA).
- (74) Agent: OGILVY RENAULT; Suite 1600, 1981 McGill College Avenue, Montréal, Québec H3A 2Y3 (CA).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TRIMMINIG TEMPERATURE COEFFICIENTS OF ELECTRONIC COMPONENTS AND CIRCUITS

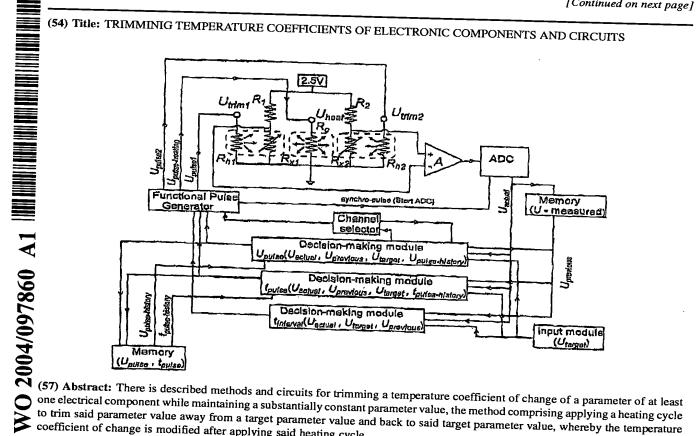

one electrical component while maintaining a substantially constant parameter value, the method comprising applying a heating cycle to trim said parameter value away from a target parameter value and back to said target parameter value, whereby the temperature coefficient of change is modified after applying said heating cycle.

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.